



# Installation Instructions

## FUZ Felt Suspended Ceiling Line of Products


### Typical Installation Detail

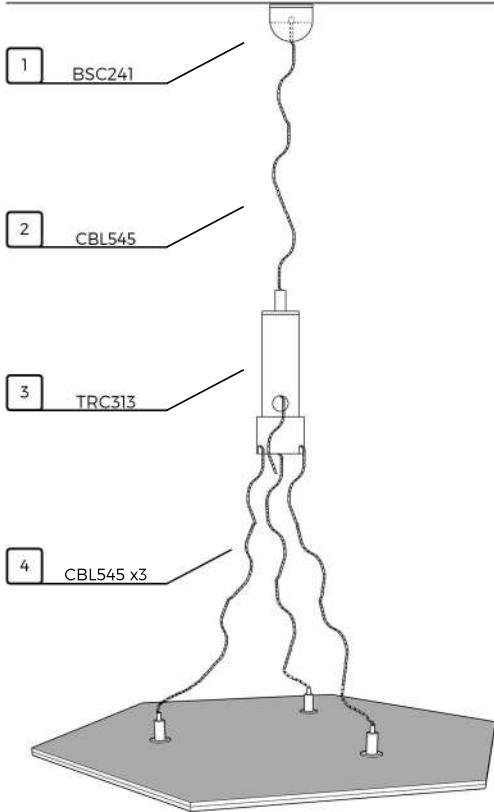


#### 1 Anchor given ceiling connector into ceiling




**BSC241**  
Fixed Ceiling Anchor  
Drywall, Metal, Concrete, Wood



**SHC229**  
Adjustable (at top) Ceiling Anchor  
Drywall, Metal, Concrete, Wood



**NHC225**  
Fixed Ceiling Anchor  
Drywall, Metal, Concrete, Wood



**TBR290**  
T-Bar Ceiling Anchor  
T-bar only


1. Choose and carefully mark location on ceiling
2. Use a drill to drill a hole on the marked spot
3. Insert screw anchor into ceiling
4. Unscrew the top of the (one of the above) given anchors and use a screw to attach to ceiling



#### 2 Route given cable through the bottom of the ceiling anchor




**CBL545**  
Cable with ball stopper  
For BSC241, NHC225, TBR290




**CBL445**  
Cable without ball stopper  
For SHC229, NHC225

1. Route the given cable through the bottom of the un-screwed ceiling anchor
2. Screw the bottom anchor portion to the top (attached to ceiling) portion of the anchor hand tight
3. Ceiling anchor should now be secured into the ceiling with cable free hanging and connected firmly

#### 3 Attach TRC313 connector onto the hanging ceiling cable (if applicable)




**TRC313**  
Adjustable cable connector/splitter (3x cables)  
\*For use when multiple connectors on the panel connect into only one ceiling connector/anchor



1. Unscrew TRC313 connector and separate top portion (one at top, one hole towards the bottom) from the bottom splitter portion (3 holes)
2. Route the already hung ceiling cable through the hole of the top portion of the ceiling connector until it passes through the bottom hole and grabs
3. Set aside the bottom portion of the connector, as it will be used for step 4

#### 4 Route 3x given cables through the bottom portion of TRC313 connector and into the panel connectors and finalize

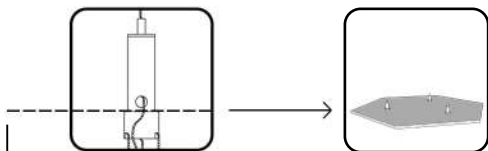

Bottom portion of connector  
(3x holes)

1. Route 3x CBL545 cables through the bottom portion of the TRC313 connector, until the end of each cables ball catches the inside of the connector and stops
2. Take each of the three cables and carefully insert them into the embedded connectors in the panel until the connectors grab the cables
3. Take the now assembled bottom portion with cables and panel and screw into the top portion of TRC313 to complete.

